



非接觸式CAN資料讀取器


Contactless CAN Probe (CCP)

Features & Specification

- ✓ Suitable for CAN Bus data monitoring
 - Transportation, Industry Automation
- ✓ Sniffing vehicle CAN bus data without connecting the signal wires
- ✓ Patented robust encapsulation to prevent environment stressing (Humidity, Dust, Temperature, Electricity, Shock...)
- ✓ Easy to install and operate
- ✓ Support 1 port CAN Bus channel
- ✓ Compatible with the ISO 11898 standard (CAN 2.0A/11-bit and CAN 2.0B/29 bit)
- ✓ Can be integrated with our CANtoUART, OBDII bridge, J1939 Bridge... products
- ✓ Provide power indicator light
- ✓ Operating Temp.: -25 to 85 °C (-13 to 185 °F)
- ✓ Operating humidity: ≤ 85 % (no condensation)
- ✓ Max operating current: ≤ 8 mA (@28 V)
- ✓ Operating voltage: +9 to +36 VDC
- ✓ Dimensions: 40 x 20 x 10 (mm)

Pinout & Wiring

No.	Item	Describe
1	GND	(BK) 9 ~ 36 VDC (-)
2	VDD	(RD) 9 ~ 36 VDC (+)
3	CAN L	(GN) CAN Low
4	CAN H	(WH) CAN High

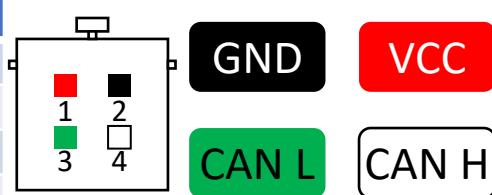

User Guide

1. Slide the upper cap (Fig. 1) and open for placing CANH and CANL (Fig 2).
2. Placing the CANH and CANL (Fig 3).
3. Recapping the cover (Fig 4).

Note: You can use cable tie on top of the cap to make it more robust.



Fig 1



Fig 2



Fig 3



Fig 4

